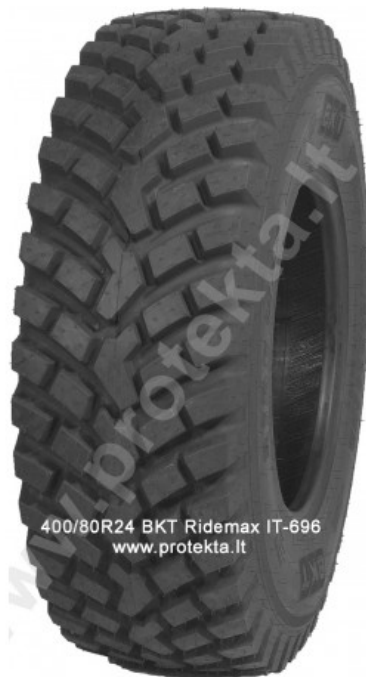


**Tyre 400/80R24 (14.9R24) Ridemax IT696 BKT 149A8/144D TL**

|                                   |                    |
|-----------------------------------|--------------------|
| Category                          | Agricultural tyres |
| Size                              | 400/80R24          |
| Model                             | Ridemax IT696      |
| Ply                               |                    |
| Load ind. (LI)                    | 149                |
| Speed ind. (SI)                   | A8                 |
| Maximum load per tire, kg         | 3250               |
| Maximum speed, km/h               | 40                 |
| Inflation pressure, atm           | 3.20               |
| Analogue                          | 14.9-24            |
| Outer diameter (OD), mm           | 1250               |
| Section Width (SW), mm            | 404                |
| Dynamic rolling circumference, mm | 3760               |
| Static Loaded Radius, mm          | 558                |
| Recomend/permitted rim            | D13; W12; W14L     |
| Radial/ bias                      | Radial             |
| Origin                            | IN                 |
| TT / TL                           | TL                 |
| Komplektacija                     | TL                 |

|             |           |
|-------------|-----------|
| Delivery    | ---       |
| Warranty    | 60 months |
| Description |           |

All technical information about products in our website protekta.lt is based on the information given by the manufacturers. This information serves only information purposes and it is not mandatory.