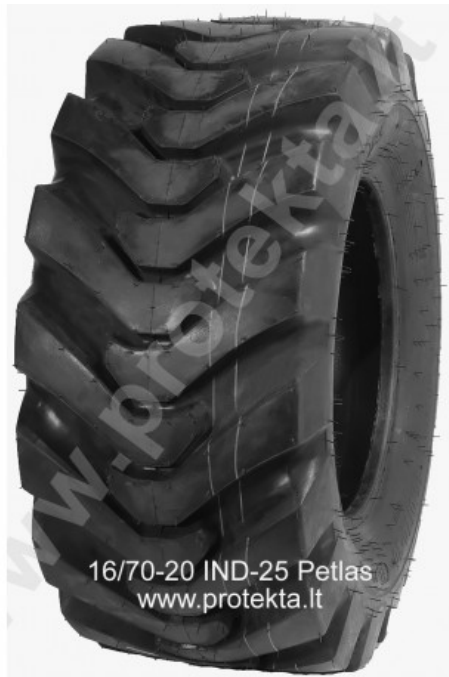


Tyre 16.0/70-20 (405/70-20) IND25 Petlas 14PR 154A8 TL

Category	Industrial tyres
Size	16.0/70-20
Model	IND25
Ply	14
Load ind. (LI)	154
Speed ind. (SI)	A8
Maximum load per tire, kg	3750
Maximum speed, km/h	40
Inflation pressure, atm	3.5
Analogue	405/70R20
Recomend/permitted rim	13; 12SDC; 13SDC; 14
Radial/ bias	Bias
Outer diameter (OD), mm	1097
Section Width (SW), mm	418
Static Loaded Radius, mm	496
Dynamic rolling circumference, mm	3181
TT / TL	TL
Komplektacija	TL

Delivery	1-5 w/d
Warranty	60 months
Description	

All technical information about products in our website protekta.lt is based on the information given by the manufacturers. This information serves only information purposes and it is not mandatory.